
CS-2 HINGED CONTROL SWITCH SAFETY COVER INSTALLATION INSTRUCTIONS

The Sentinel CS-2Hinge can be installed in minutes and does not require any drilling, disturbing of the switch wiring, or removal of the control switch from the panel. All you need is a flathead screwdriver.

Note: Only qualified persons who are familiar with the control system should install the CS-1Hinge Control Switch Safety Cover.

WHAT'S IN THE BOX

The Sentinel CS-2Hinge comes with two parts: the main switch cover with hinge, and the bottom locking plate. In addition, you will find six 10 x 32 machine screws in the kit. If needed, these will replace the stock mounting screws, allowing for the extra width created by the top hinge plate and bottom lock plate. Which screw length used is determined by the type of escutcheon plate of the switch.

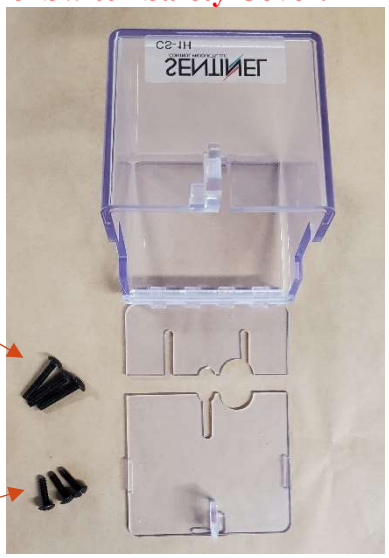

01

First step in the installation process is to remove the control switch handle. Care should be taken **not to move the handle** in an undesirable direction. To do this, you'll need a firm grip on the handle, then remove the screw that holds the handle.



TIP: This is not always necessary. But care should be taken when removing the bottom screw and not disturbing the handle

02



Next, one at a time, remove the mounting screws from the control switch and **replace them with the longer screw**s we provided in your kit. Do not tighten the screws down at this time.

Tip: If the indicating lights are close to the switch, you may choose to temporarily leave one screw out to facilitate installation of the main switch cover with hinge.

SENTINEL CONTROL PRODUCTS, Inc

LaGrande, OR 97850
Phone: (503) 383-6528
Email: info@sentinelcontrolproducts.com

Since 2014

www.SentinelControlProducts.com

03

From here, you will place the “Main Switch Cover with Hinge” between the escutcheon plate and the panel.





Then install the bottom lock plate. Check for alignment and tighten the screws.

04

Ensure the cover operates smoothly and the holes on the locking tabs align properly.



Carefully replace the Control Switch Handle.



05

CHECK THERE IS CLEARANCE BETWEEN THE HANDLE AND THE ESCUTCHEON PLATE OF THE CONTROL SWITCH.



You are ready to use the CS-2Hinge Control Switch Safety Cover.

QUESTIONS?

If you have any questions regarding out Control Switch Safety Covers and their installation, please reach out to us via phone or on our contact page. We are happy to provide you with more information about the CS-2Hinge and proper installation.

The CS-2Hinge is a “UL” recognized component and can be installed by “UL 508A” panel shops. *Underwriters Laboratories File 480471*

The CS-2 Hinge is intended for Indoor Use.

SENTINEL CONTROL PRODUCTS, Inc

LaGrande, OR 97850
Phone: (503) 383-6528
Email: info@sentinelcontrolproducts.com

Since 2014

www.SentinelControlProducts.com